


# Incremental encoders

<b>Heavy Duty shaft, optical</b>	<b>Sendix Heavy Duty H100 (shaft)</b>	<b>Push-pull / RS422 / speed switch</b>
----------------------------------	---------------------------------------	---

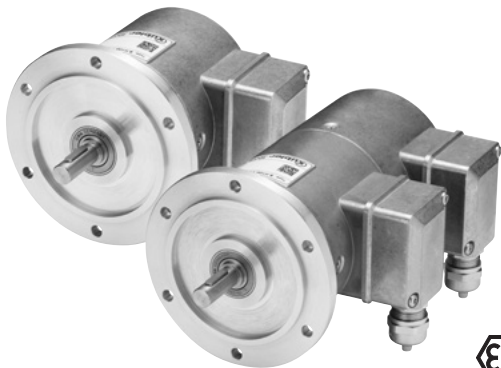

The Sendix Heavy Duty encoder H100 is an extremely rugged incremental encoder available in 3 versions: encoder with or without speed switch and double encoder.

Thanks to the special HD-Safety-Lock™ construction it is ideally suited for applications in heavy industry, such as steel works and cranes. Resistant materials, wide temperature ranges and a high protection level ensure it remains unaffected by the harshest environmental conditions. Its innovative connection technology enables simple quick installation.

HD-Safety-Lock™	High rotational speed	Temperature range	High protection level	Shock/vibration resistant	Magnetic field proof	Plug-in cage-clamp connectors	Spring terminal connectors	Reverse polarity protection	Optical sensor	Seawater durable

### Suitable for your Heavy Duty application

- HD-Safety-Lock™ bearing construction for an extremely high bearing load capacity of up to 300 N axial and 400 N radial.
- With a temperature range from -40°C up to +100°C, IP66 protection and seawater durable material the encoder is resistant to harsh environmental conditions.
- Feather key shaft slot ensures positive fitting to the application.
- Safe overspeed protection by means of mechanical speed switch.

### Simple quick installation

- Innovative plug-in spring terminal connectors in the terminal box greatly simplify the cable connection and offer a very high level of safety.
- Various connection possibilities thanks to terminal box being rotatable through 180°.
- Large number of resolution and switching speed options available as standard.

### Order code without speed switch

<b>8.H100</b>	.	1	1	1	X	.	XXXX
Type		a	b	c	d		e

**a** Flange

1 = Euro RE0444

**b** Shaft (ø x L), with feather key shaft slot

1 = ø 11 x 30 mm [0.43 x 1.18"]

**c** Version

1 = incremental encoder

**d** Output circuit / power supply

1 = RS422 (with inverted signal) / 5 ... 30 V DC  
2 = Push-pull (with inverted signal) / 10 ... 30 V DC

**e** Pulse rate

1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400,  
500, 512, 600, 800, 1000, 1024, 1200, 2000,  
2048, 2500, 3600, 4096, 5000  
(e.g. 100 pulse => 0100)

*Optional on request*

- other pulse rates  
- Ex 2/22

### Order code with speed switch

<b>8.H100</b>	.	1	1	2	X	.	XXXX	.	XXXX	.	1
Type		a	b	c	d		e		f		g

**a** Flange

1 = Euro RE0444

**b** Shaft (ø x L), with feather key shaft slot

1 = ø 11 x 30 mm [0.43 x 1.18"]

**c** Version

2 = incremental encoder with mech. speed switch

**d** Output circuit / power supply

1 = RS422 (with inverted signal) / 5 ... 30 V DC  
2 = Push-pull (with inverted signal) / 10 ... 30 V DC

**e** Pulse rate

1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400,  
500, 512, 600, 800, 1000, 1024, 1200, 2000,  
2048, 2500, 3600, 4096, 5000  
(e.g. 100 pulse => 0100)

**f** Switching speed

750, 1000, 2000, 3000, 4000

**g** Switching accuracy

1 = standard (±4 % at 100 rad/s<sup>2</sup>)

*Optional on request*

- other pulse rates  
- other switching speeds  
- other switching accuracies  
- Ex 2/22

# Incremental encoders

<b>Heavy Duty shaft, optical</b>	<b>Sendix Heavy Duty H100 (shaft)</b>	<b>Push-pull / RS422 / speed switch</b>																				
<b>Order code double encoder</b>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">8.H100</td> <td style="padding: 2px;">.</td> <td style="padding: 2px;">1</td> <td style="padding: 2px;">1</td> <td style="padding: 2px;">3</td> <td style="padding: 2px;">X</td> <td style="padding: 2px;">.</td> <td style="padding: 2px;">XXXX</td> <td style="padding: 2px;">.</td> <td style="padding: 2px;">XXXX</td> </tr> <tr> <td style="font-size: 8px; text-align: center;">Type</td> <td></td> <td style="font-size: 8px; text-align: center;">a</td> <td style="font-size: 8px; text-align: center;">b</td> <td style="font-size: 8px; text-align: center;">c</td> <td style="font-size: 8px; text-align: center;">d</td> <td></td> <td style="font-size: 8px; text-align: center;">e</td> <td></td> <td style="font-size: 8px; text-align: center;">f</td> </tr> </table>		8.H100	.	1	1	3	X	.	XXXX	.	XXXX	Type		a	b	c	d		e		f
8.H100	.	1	1	3	X	.	XXXX	.	XXXX													
Type		a	b	c	d		e		f													
<b>a</b> Flange 1 = Euro RE0444	<b>d</b> Output circuit / power supply 1 = RS422 (with inverted signal) / 5 ... 30 V DC 2 = Push-pull (with inverted signal) / 10 ... 30 V DC	<b>f</b> Pulse rate encoder 2 1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 100 pulse => 0100)																				
<b>b</b> Shaft ( $\varnothing \times L$ ), with feather key shaft slot 1 = $\varnothing 11 \times 30$ mm [0.43 x 1.18"]	<b>e</b> Pulse rate encoder 1 1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 100 pulse => 0100)	<i>Optional on request</i> - other pulse rates - Ex 2/22																				
<b>c</b> Version 3 = 2 x incremental encoder																						

Mounting accessory	Order no.
<b>Coupling</b> double loop coupling for shaft 12 mm [0.47"] with feather key shaft slot 4 mm [0.16"]	<b>8.0000.1L01.1112</b>
<b>Accessories – connecting cable</b> <span style="float: right;">Order no.</span>	
<b>Encoder cable</b> PUR-trailing cable, shielded, halogen free, orange 4 x 2 x 0.25 mm <sup>2</sup> [AWG 23] + 2 x 1 mm <sup>2</sup> [AWG 17], twisted pair	<b>8.0000.6400.XXXX</b> <sup>1)</sup>
<b>Speed switch cable</b> TPE-trailing cable, shielded, halogen free, black – 5 x 0.75 mm <sup>2</sup> [AWG 18]	<b>8.0000.6600.XXXX</b> <sup>1)</sup>

Technical data	
<b>Mechanical characteristics</b>	
<b>Maximum speed</b>	6000 min <sup>-1</sup>
<b>Starting torque with seal – at 20°C [68°F]</b>	~ 2 Ncm
<b>Load capacity of shaft</b>	radial 400 N axial 300 N
<b>Weight</b>	H100 ~ 1.8 kg [63.49 oz] H100 + speed switch ~ 2.7 kg [95.24 oz]
<b>Protection acc. to EN 60529</b>	IP66
<b>Working temperature range (surface of housing)</b>	-40°C ... +100°C [-40°F ... + 212°F]
<b>Materials</b>	shaft stainless steel housing aluminum die-cast (EN AC-44300), seawater durable coating flange seawater durable aluminum type Al Si Mg Mn (EN AW-6082)
<b>Shock resistance acc. to EN 60068-2-27</b>	3000 m/s <sup>2</sup> (1 ms)
<b>Vibration resistance acc. to EN 60068-2-27</b>	without speed switch 100 m/s <sup>2</sup> , 10 ... 2000 Hz with speed switch, switching speed > 1000 100 m/s <sup>2</sup> , 10 ... 400 Hz with speed switch, switching speed < 1000 50 m/s <sup>2</sup> , 10 ... 400 Hz
<b>Electrical characteristics</b>	
<b>Output circuit</b>	<b>RS422</b> (TTL compatible) <b>Push-pull (HTL)</b> up to 150 m [492.13'] cable length
<b>Power supply</b>	5 ... 30 V DC      10 ... 30 V DC
<b>Power consumption (no load) with inverted signal</b>	typ. 40 mA      typ. 50 mA max. 90 mA      max. 100 mA
<b>Permissible load per channel</b>	DC      max. +/- 20 mA      max. +/- 30 mA peak      max. +/- 30 mA      max. +/- 70 mA
<b>Pulse frequency</b>	max. 300 kHz      max. 300 kHz
<b>Pulse frequency with 150 m [492.13'] cable length</b>	max. 300 kHz      max. 80 kHz
<b>Signal level</b>	HIGH      min. 2.5 V      min. +V - 2.5 V LOW      max. 0.5 V      max. 0.5 V
<b>Rising edge time t<sub>r</sub></b>	max. 200 ns      max. 1 μs
<b>Falling edge time t<sub>f</sub></b>	max. 200 ns      max. 1 μs
<b>Short circuit proof outputs</b> <sup>2)</sup>	yes <sup>3)</sup> yes
<b>Reverse polarity protection of the power supply</b>	yes      yes
<b>CE-compliant acc. to</b>	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

1) XXXX = cable length in meters.  
2) If power supply +V correctly applied.  
3) Only one channel allowed to be shorted-out:  
At +V short circuit to channel or 0 V is permitted.


# Incremental encoders

<b>Heavy Duty shaft, optical</b>	<b>Sendix Heavy Duty H100 (shaft)</b>	<b>Push-pull / RS422 / speed switch</b>
----------------------------------	---------------------------------------	---

Speed switch	
<b>Switching speed (ns)</b>	750 ... 4000 min <sup>-1</sup>
<b>Max. rotational speed (mechanical)</b>	1.25 x ns
<b>Switching accuracy</b> with acceleration $\alpha = 100 \text{ rad/s}^2$ (corresponds $\Delta n = 955 \text{ min}^{-1}/\text{s}$ )	$\pm 4 \%$ of ns
<b>Switching difference cw/ccw rotation</b>	$\sim 3 \%$
<b>Switching hysteresis (Xd)</b>	$\sim 40 \%$ up to $80 \%$ of ns
<b>Switching capacity</b>	3 A / max. 50 V AC 1 A / max. 75 V DC

(more details see manual)


### Definition switching hysteresis (Xd)

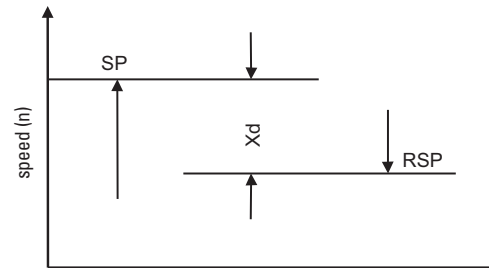


SP = switching point (for switching speed ns)  
RSP = reset point  
Xd = switching difference (hysteresis)

### Terminal assignment terminal connections

#### Incremental encoders




B incremental track B  
A incremental track A  
- 0 V  
+ +V  
PE shield




0 incremental track 0  
 $\bar{A}$  incremental track  $\bar{A}$   
 $\bar{B}$  incremental track  $\bar{B}$   
 $\bar{0}$  incremental track  $\bar{0}$

#### Speed switch



4, 1 normally open (NO)  
3, 2 normally closed (NC)  
PE shield

#### Jumper

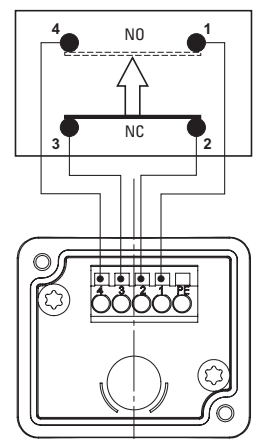

# Incremental encoders


<b>Heavy Duty shaft, optical</b>	<b>Sendix Heavy Duty H100 (shaft)</b>	<b>Push-pull / RS422 / speed switch</b>
----------------------------------	---------------------------------------	---

## Dimensions

Dimensions in mm [inch]

### Incremental encoder Version 1

- 1 Feather key acc. to ISO 773  
4 x 4 x 20 [0.16 x 0.16 x 0.79]

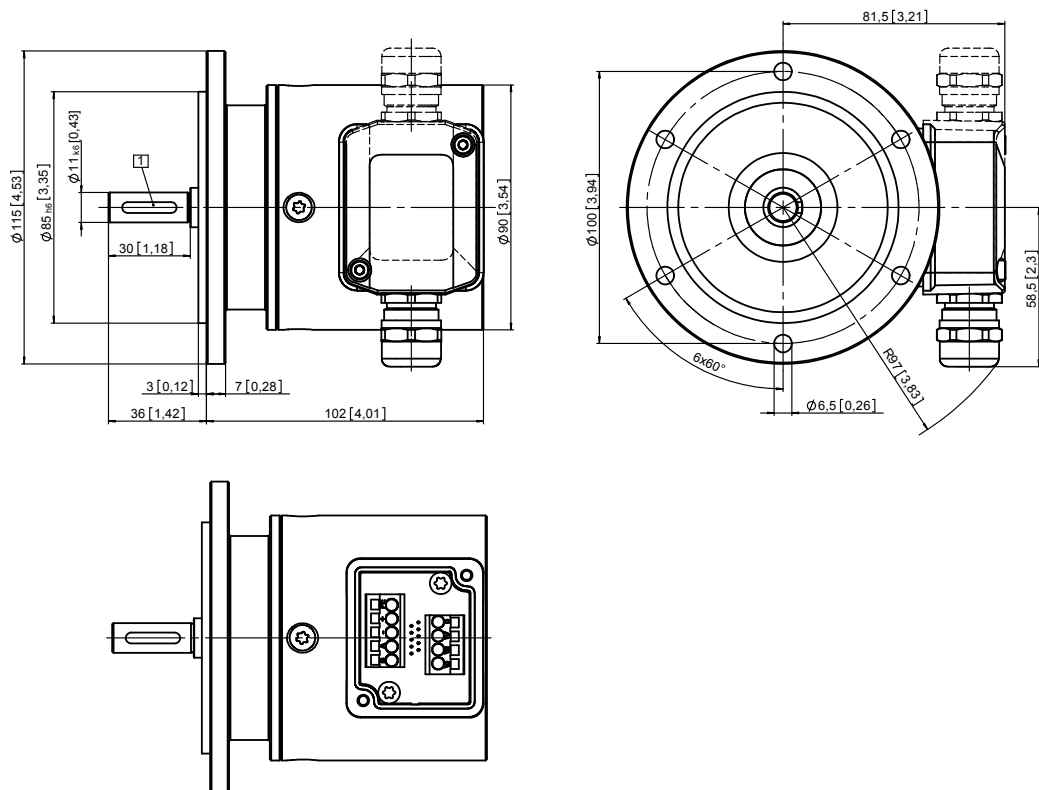

# Incremental encoders

<b>Heavy Duty shaft, optical</b>	<b>Sendix Heavy Duty H100 (shaft)</b>	<b>Push-pull / RS422 / speed switch</b>
----------------------------------	---------------------------------------	---

## Dimensions

Dimensions in mm [inch]

**Incremental encoder with mechanical speed switch or 2 x incremental encoder (double encoder) Version 2 or 3**

- 1 Feather key acc. to ISO 773  
4 x 4 x 20 [0.16 x 0.16 x 0.79]

