

FEATURES

- ▶ Available in easy to read RED, BLUE or GREEN LED
- ▶ Built in shunts

The DLA20-DCA Series utilizes an on-board shunt to provide a digital read out of the monitored dc current.

SPECIFICATIONS

DISPLAY

Numeral Size: .37" (9.4 mm)
 Overrange: three lower order digits blank
 Supply Voltage: 5-40 Vdc, 10-51 mA

INPUTS

Input Ranges: 199.9µA, 1.999mA, 19.99mA
 199.9mA, 1.999A, 19.99A

PERFORMANCE

Accuracy: 0.2% FS
 Sampling Rate: 2.5 per second

ENVIRONMENT

Operating Temperature: -10 to 50 °C
 Max Humidity: 95% (non-condensing)

CONNECTION

4 terminal

ORDERING INFO


PART NUMBER	METER COLOR	METER INPUT
DLA20-DCA-R-1.....	RED	199.9µA
DLA20-DCA-B-1.....	BLUE.....	199.9µA
DLA20-DCA-G-1.....	GREEN	199.9µA
DLA20-DCA-R-2.....	RED	1.999mA
DLA20-DCA-B-2.....	BLUE.....	1.999mA
DLA20-DCA-G-2.....	GREEN	1.999mA
DLA20-DCA-R-3.....	RED	19.99mA
DLA20-DCA-B-3.....	BLUE.....	19.99mA
DLA20-DCA-G-3.....	GREEN	19.99mA
DLA20-DCA-R-4.....	RED	199.9mA
DLA20-DCA-B-4.....	BLUE.....	199.9mA
DLA20-DCA-G-4.....	GREEN	199.9mA
DLA20-DCA-R-5.....	RED	1.999A
DLA20-DCA-B-5.....	BLUE.....	1.999A
DLA20-DCA-G-5.....	GREEN	1.999A
DLA20-DCA-R-6.....	RED	19.99A
DLA20-DCA-B-6.....	BLUE.....	19.99A
DLA20-DCA-G-6.....	GREEN	19.99A

ACCESSORIES INCLUDED


DLA-BEZ-20-G Bezel Assembly

PANEL INSTALLATION


Step 1

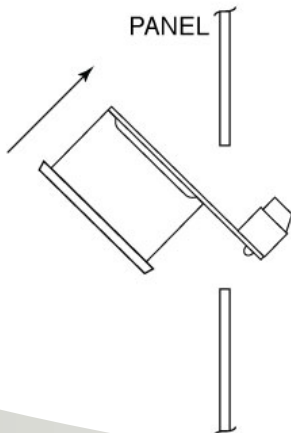

Step 2

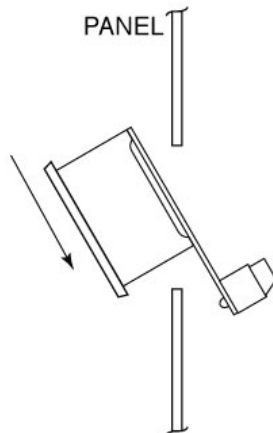

Step 3

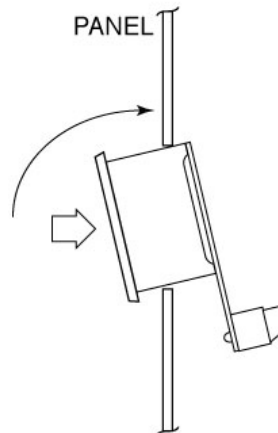

Step 4

