

# Absolute encoders – multiturn

**Standard electronic multiturn, magnetic**


**Sendix M5861 (shaft)**

**Analog**



The Sendix M58 with Energy Harvesting Technology is an electronic multiturn encoder without gear and without battery – in the standard format with 58 mm flange.

High robustness and high resolution make this encoder the ideal device for use in demanding applications.

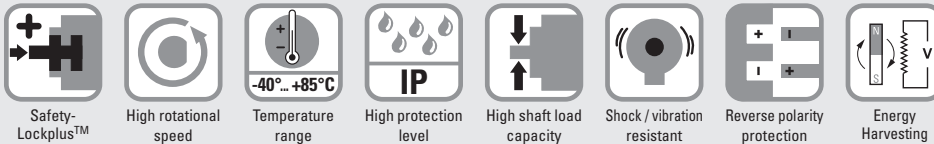

### Highest robustness

- Sturdy bearing construction in Safety-Lockplus™ design for particularly high resistance.
- Extra large bearings.
- Mechanically protected shaft seal.
- Wide temperature range -40°C ... +85°C.
- Without gear and without battery, thanks to the Energy Harvesting technology.

### Application oriented

- Current output 4 ... 20 mA.
- Voltage output 0 ... 10 V or 0 ... 5 V.
- Measuring range scalable.
- Limit switch function.

**Order code** 8.M5861.XXXX.XX12  
**Shaft version** Type

<b>a</b> Version 3 = clamping flange, IP65, ø 58 mm [2.28"] 4 = synchro flange, IP65, ø 58 mm [2.28"]	<b>d</b> Type of connection 2 = radial cable, 1 m [3.28'] PVC B = radial cable, special length PVC *) 4 = radial M12 connector, 5-pin D = radial M12 connector, 5-pin <sup>2)</sup>  *) Available special lengths (connection types B): 2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm ex.: 8.M5861.3132.3112.0030 (for cable length 3 m)	<b>f</b> Measuring range 1 = 16 revolutions / cw 2 = 16 revolutions / ccw 3 = scalable up to 65,536 revolutions, with limit switch function / cw 4 = scalable up to 65,536 revolutions, without limit switch function / cw 5 = scalable up to 65,536 revolutions, with limit switch function / ccw 6 = scalable up to 65,536 revolutions, without limit switch function / ccw  <i>Optional on request</i> - Ex 2/22 (only for connection type 4)
<b>b</b> Shaft (ø x L), with flat 1 = ø 6 x 12.5 mm [0.24 x 0.49"] 5 = ø 10 x 20 mm [0.39 x 0.79"]	<b>e</b> Interface / resolution / power supply 3 = 4 ... 20 mA / 12 bit / 10 ... 30 V DC 4 = 0 ... 10 V / 12 bit / 15 ... 30 V DC 5 = 0 ... 5 V / 11 bit / 10 ... 30 V DC	
<b>c</b> Output circuit <sup>1)</sup> 3 = current output 4 = voltage output		

Connection technology		Order no.
<b>Coupling</b>	Bellows coupling ø 19 mm [0.75"] for shaft 10 mm [0.39"]	<b>8.0000.1102.1010</b>
Connection technology		Order no.
<b>Cordset, pre-assembled</b>	M12 female connector with coupling nut, 5-pin, 2 m [6.56'] PVC cable	<b>05.00.6081.2211.002M</b>
<b>Connector, self-assembly (straight)</b>	M12 female connector with coupling nut, 5-pin	<b>8.0000.5116.0000</b>

Further accessories can be found in the accessories section or in the accessories area of our website at: [www.kuebler.com/accessories](http://www.kuebler.com/accessories).  
 Additional connectors can be found in the connection technology section or in the connection technology area of our website at: [www.kuebler.com/connection\\_technology](http://www.kuebler.com/connection_technology).

1) Output circuit "3" only in conjunction with interface "3", output circuit "4" only in conjunction with interface "4" or "5".

2) Special terminal assignment.

# Absolute encoders – multiturn

<b>Standard electronic multiturn, magnetic</b>	<b>Sendix M5861 (shaft)</b>	<b>Analog</b>
--	-----------------------------	---------------

## Technical data

Electrical characteristics current interface 4 ... 20 mA	
<b>Power supply</b>	10 ... 30 V DC
<b>Current consumption (no load)</b>	max. 30 mA
<b>Reverse polarity protection of the power supply</b>	yes
<b>Short-circuit proof outputs</b>	yes <sup>1)</sup>
<b>Measuring range</b>	factory setting 2 <sup>4</sup> revolutions optionally scalable up to 2 <sup>16</sup> revolutions
<b>DA converter resolution</b>	12 bit
<b>Singleturn accuracy, at 25°C [77°F]</b>	±1°
<b>Temperature coefficient</b>	< 100 ppm/K
<b>Repeat accuracy, at 25°C [77°F]</b>	±0.2°
<b>Output load</b>	at 10 V DC max. 200 Ohm at 24 V DC max. 900 Ohm at 30 V DC max. 1200 Ohm
<b>Setting time</b>	< 1 ms, R <sub>Burden</sub> = 900 Ohm, 25°C [77°F]
<b>LEDs (green/red)</b>	<ul style="list-style-type: none"> <li>- system status</li> <li>- current loop interruption – input load too high</li> <li>- reference point display (only with factory settings) at cw: betw. 0° and 1° at ccw: betw. 0° and -1°</li> <li>- status in teach mode</li> </ul>
<b>Options</b>	<ul style="list-style-type: none"> <li>- output signal scalable via the teach inputs</li> <li>- output signal scalable via the teach inputs + limit switch function</li> </ul>
<b>Teach inputs</b>	level = +V for 1 s minimum
<b>PowerON Time</b>	< 1 s
<b>Update rate</b>	1 ms
<b>CE compliant acc. to</b>	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

Mechanical characteristics	
<b>Maximum speed</b>	4000 min <sup>-1</sup> 2000 min <sup>-1</sup> (continuous)
<b>Starting torque at 20°C [68°F]</b>	< 0.01 Nm
<b>Shaft load capacity</b>	radial 80 N axial 40 N
<b>Weight</b>	approx. 0.2 kg [7.06 oz]
<b>Protection acc. to EN 60529/DIN 40050-9</b>	IP65
<b>Working temperature range</b>	-40°C ... +85°C [-40°F ... +185°F]
<b>Materials</b>	shaft V2A flange aluminum housing zinc die-cast cable PVC
<b>Shock resistance acc. to EN 60068-2-27</b>	5000 m/s <sup>2</sup> , 4 ms
<b>Vibration resistance acc. to EN 60068-2-6</b>	300 m/s <sup>2</sup> , 10 ... 2000 Hz

Electrical characteristics voltage interface 0 ... 10 V / 0 ... 5 V	
<b>Power supply</b>	output 0 ... 5 V 10 ... 30 V DC output 0 ... 10 V 15 ... 30 V DC
<b>Current consumption (no load)</b>	max. 30 mA
<b>Reverse polarity protection of the power supply</b>	yes
<b>Short-circuit proof outputs</b>	yes <sup>1)</sup>
<b>Measuring range</b>	factory setting 2 <sup>4</sup> revolutions optionally scalable up to 2 <sup>16</sup> revolutions
<b>DA converter resolution</b>	0 ... 10 V 12 bit 0 ... 5 V 11 bit
<b>Singleturn accuracy, at 25°C [77°F]</b>	±1°
<b>Temperature coefficient</b>	< 100 ppm/K
<b>Repeat accuracy, at 25°C [77°F]</b>	±0.2°
<b>Current output</b>	max. 10 mA
<b>Setting time</b>	< 1 ms, R <sub>Load</sub> = 1000 Ohm, 25°C [77°F]
<b>LEDs (green/red)</b>	<ul style="list-style-type: none"> <li>- system status</li> <li>- reference point display (only with factory settings) at cw: betw. 0° and 1° at ccw: betw. 0° and -1°</li> <li>- status in teach mode</li> </ul>
<b>Options</b>	<ul style="list-style-type: none"> <li>- output signal scalable via the teach inputs</li> <li>- output signal scalable via the teach inputs + limit switch function</li> </ul>
<b>Teach inputs</b>	level = +V for 1 s minimum
<b>PowerON Time</b>	< 1 s
<b>Update rate</b>	1 ms
<b>CE compliant acc. to</b>	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

 Absolute encoders  
multiturn

1) When the power supply is correctly applied.  
But not output to +V. Power supply and sensor output signal are not galvanically isolated.

# Absolute encoders – multiturn


**Standard  
electronic multiturn, magnetic**

**Sendix M5861 (shaft)**


**Analog**

## Example (output signal evolution) – factory setting

### Measuring range 1 (cw version)

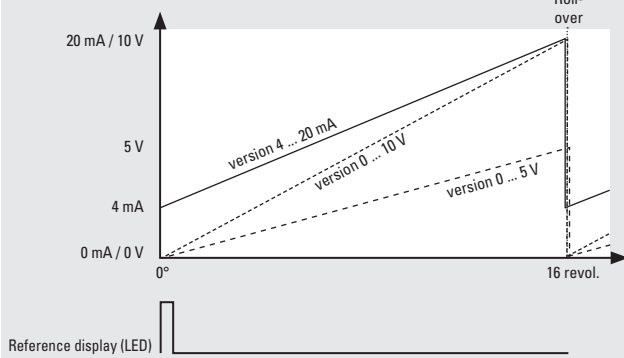


### Measuring range 2 (ccw version)

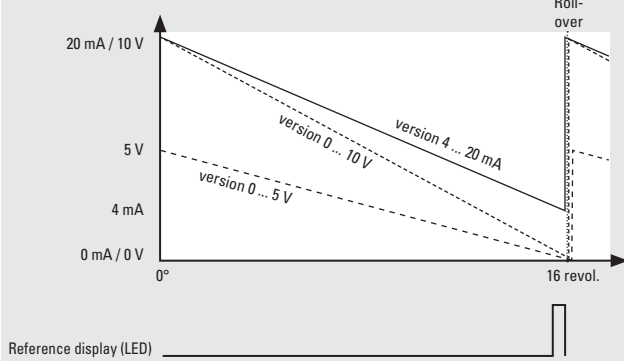


## Example (output signal evolution) – option: scalable

### Measuring range 4, 6 (scalable version without limit switch function)

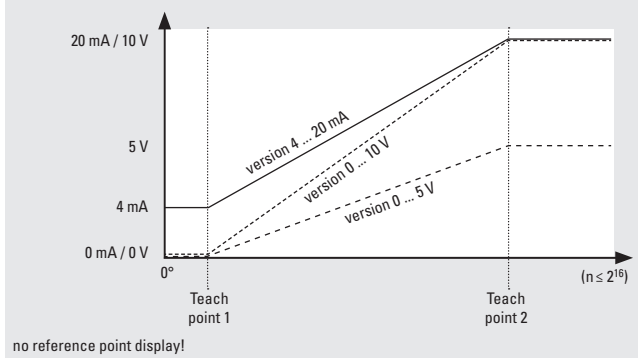

### Measuring range 3, 5 (scalable version with limit switch function)

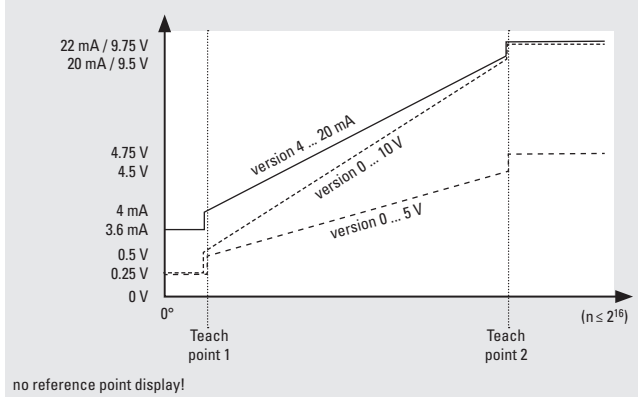

### Factory-set measuring range

2<sup>4</sup> revolutions with roll-over

Limit switch function	version	0 ... 10 V	0 ... 5 V	4 ... 20 mA
limit switch low		0.25 V	0.25 V	3.6 mA
limit switch high		9.75 V	4.75 V	22.0 mA

1) For scalable version.

# Absolute encoders – multiturn

<b>Standard electronic multiturn, magnetic</b>	<b>Sendix M5861 (shaft)</b>	<b>Analog</b>
--	-----------------------------	---------------

## Terminal assignment

Interface	Type of connection	Cable (isolate unused wires individually before initial start-up)					
3 (current)	2, B	Signal:	0 V	+V	+I	SET 1 <sup>1)</sup>	SET 2 <sup>1)</sup>
		Cable color:	WH	BN	GN	GY	PK
M12 connector, 5 pin							
3 (current)	4	Signal:	0 V	+V	+I	SET 1 <sup>1)</sup>	SET 2 <sup>1)</sup>
		Pin:	3	2	1	5	4
M12 connector, 5 pin							
3 (current)	D	Signal:	0 V	+V	+I	SET 1 <sup>1)</sup>	SET 2 <sup>1)</sup>
		Pin:	3	1	2	4	5
Cable (isolate unused wires individually before initial start-up)							
4, 5 (voltage)	2, B	Signal:	0 V	+V	+U	SET 1 <sup>1)</sup>	SET 2 <sup>1)</sup>
		Cable color:	WH	BN	GN	GY	PK
M12 connector, 5 pin							
4, 5 (voltage)	4	Signal:	0 V	+V	+U	SET 1 <sup>1)</sup>	SET 2 <sup>1)</sup>
		Pin:	3	2	1	5	4
M12 connector, 5 pin							
4, 5 (voltage)	D	Signal:	0 V	+V	+U	SET 1 <sup>1)</sup>	SET 2 <sup>1)</sup>
		Pin:	3	1	2	4	5

+V : encoder power supply +V DC

+U : voltage


SET 1 : set input for teachpoint 1

0 V : encoder power supply ground GND (0 V)

+I : current

SET 2 : set input for teachpoint 2

Top view of mating side, male contact base



M12 connector, 5-pin

# Absolute encoders – multiturn

<b>Standard electronic multiturn, magnetic</b>	<b>Sendix M5861 (shaft)</b>	<b>Analog</b>
--	-----------------------------	---------------



## Dimensions

Dimensions in mm [inch]

### Clamping flange, ø 58 [2.28] Flange type 3

- 1 3 x M4, 10 [0.39] deep
- 2 3 x M3, 6 [0.24] deep

D	Fit	L
6 [0.24]	h7	12.5 [0.49]
10 [0.39]	f7	20 [0.79]

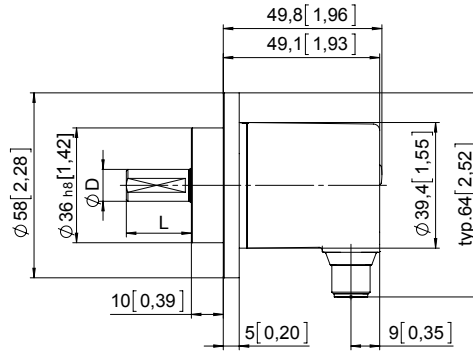

### Synchro flange, ø 58 [2.28] Flange type 4

- 1 3 x M4, 10 [0.39] deep

D	Fit	L
6 [0.24]	h7	12.5 [0.49]
10 [0.39]	f7	20 [0.79]

